

VPI calls for Temporal Logic Operators


Aligned with p1800-2008-draft 4

Objectives:

Elaborate VPI for the new operators introduced in 1932.

36.45 Property specification


REPLACE (note to editor: only affected parts are shown)

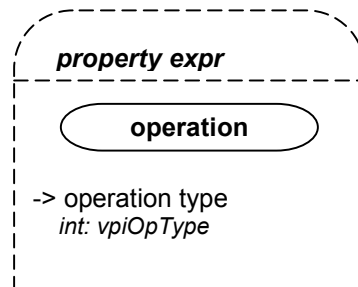

Details:

- 1) Variables are declarations of property variables. The value of these variables cannot be accessed.
- 2) Within the context of a property expr, **vpiOpType** can be any one of **vpiNotOp**, **vpiOverlapImplyOp**, **vpiNonOverlapImplyOp**, **vpiCompAndOp**, **vpiCompOrOp**, **vpiIfOp** or **vpiIfElseOp**. Operands to these operations shall be provided in the same order as shown in the BNF.

WITH

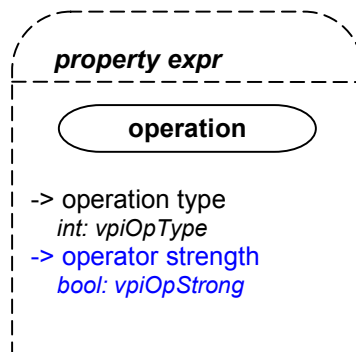

Details:

- 1) Variables are declarations of property variables. The value of these variables cannot be accessed.
- 2) Within the context of a property expr, **vpiOpType** can be any one of **vpiNotOp**, **vpiOverlapImPLYOp**, **vpiNonOverlapImPLYOp**, **vpiCompAndOp**, **vpiCompOrOp**, ~~**vpiIfOp**~~, **vpiIfElseOp**, **vpiOverlapFollowedByOp**, **vpiNonOverlapFollowedByOp**, **vpiNextOp**, **vpiAlwaysOp**, **vpiEventuallyOp**, **vpiUntilOp**, and **vpiUntilWithOp**. Operands to these operations shall be provided in the same order as shown in the BNF- with the following exceptions:
 - **vpiNextOp**: Arguments shall be: property, constant. constant shall only be given if different from 1.
 - **vpiAlwaysOp** and **vpiEventuallyOp**: Arguments shall be: property, left range, right range. Left range shall only be given if different from 0. Right range shall only be given if it has a finite value.
- 3) **vpiOpStrong** is valid only for operations **vpiNextOp**, **vpiAlwaysOp**, **vpiEventuallyOp**, **vpiUntilOp**, **vpiUntilWithOp** and for sequence expression; true indicates the strong version of the corresponding operator.

M.2 Source code

REPLACE

```

#define vpiImPLYOp 50 /* implication operator */
#define vpiNonOverlapImPLYOp 51 /* |=> nonoverlapped implication */
#define vpiOverlapImPLYOp 52 /* |-> overlapped implication operator */
  
```

WITH

```

#define vpiImPLYOp 50 /* implication operator */
#define vpiNonOverlapImPLYOp 51 /* |=> nonoverlapped implication */
#define vpiOverlapImPLYOp 52 /* |-> overlapped implication operator */
#define vpiOverlapImPLYOp editor to fill /* #-# overlapped followed_by operator */
#define vpiNonOverlapFollowedByOp editor to fill /* #-# overlapped followed_by operator */
#define vpiNextOp editor to fill /* next operator */
#define vpiAlwaysOp editor to fill /* always operator */
  
```

```
#define vpiEventuallyOp editor to fill /* eventually operator */  
#define vpiUntilOp editor to fill /* until operator */  
#define vpiUntilWithOp editor to fill /* until_with operator */
```

REPLACE

```
#define vpiLocalVarDecls 609
```

WITH

```
#define vpiLocalVarDecls 609  
#define vpiOpStrong editor to fill /* strength of temporal operator */
```